


## Tighten/Loosen Belt on WASP

Tools required: 2.4mm Allen key

- Locate the hole in-front of the belt
- Use an Allen key to adjust the screw inside the hole.
  - To tighten the belt, turn the Allen key counter-clockwise
  - To loosen the belt, turn the Allen key clockwise.

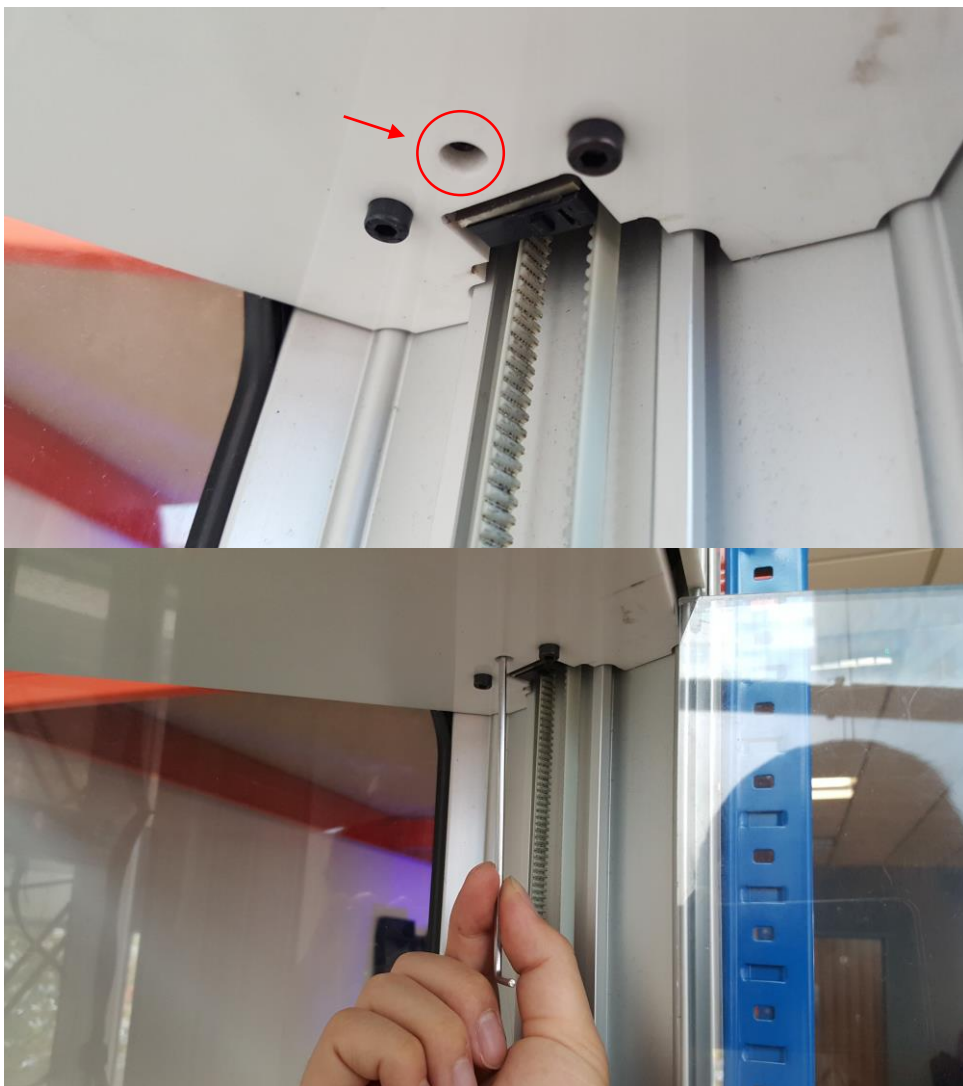

For further assistance with this guide, or any other issue related to the WASP printer, contact iMakr Technical Support at [support@imakr.com](mailto:support@imakr.com).

-iMakr Engineering Team